

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents
United States Patent and Trademark
Office
Box PCT
Washington, D.C.20231
ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year)

21 August 2000 (21.08.00)

International application No.

PCT/GB99/04315

Applicant's or agent's file reference

WO102WO

International filing date (day/month/year)

20 December 1999 (20.12.99)

Priority date (day/month/year)

23 December 1998 (23.12.98)

Applicant

SCHOLEY, Ian, Kenneth et al

1. The designated Office is hereby notified of its election made:



in the demand filed with the International Preliminary Examining Authority on:

17 June 2000 (17.06.00)



in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

Zakaria EL KHODARY

Telephone No.: (41-22) 338.83.38

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)

- 1 -

RINSING DEVICE

The present invention relates to rinsing devices for multi-stage cleaning of containers. In particular, the invention provides a modular rinsing device suitable for removing forming lubrication and gear oil from cans after
5 their manufacture.

The can forming process is a "wet" process. The cans are lubricated during the various forming operations and therefore have to be cleaned before they can be coated or filled. Cleaning of the newly manufactured cans is
10 carried out in a number of stages, usually commencing with rinsing the cans in water and/or detergents and finishing with rinsing in de-ionised water. The number of cleaning stages varies, depending upon the material from which the can is made and the finishing processes to be
15 applied to the cans, such as etching, coating etc.

Conventional rinsing devices comprise a plurality of washing and associated drying stages through which the cans are transported on a conveyor belt. The cans are inverted, with their open ends in contact with the belt.
20 The belt is provided by an open-work mat which allows the cleaning solution to be sprayed into and drain from the cans. As the cans pass through the washing stages of the device, high pressure nozzles spray cleaning solution (for example, water) onto the insides and outsides of the
25 cans. After each washing stage, the cans pass into the associated drying stage of the rinsing device where they are dried using air nozzles or air knives directed onto the passing cans. The cleaning fluid drains from the cans through the holes in the conveyor belt.

-2-

There are a number of disadvantages with such conventional rinser designs. As the washing and drying stages are generally arranged linearly, along a conveyor belt, and there are usually a number of such washing and drying stages, the rinsing apparatus tends to occupy a large amount of space. Furthermore, as the conveyor belt passes through the washing and drying stages with the cans, the belt has to be washed and dried during each stage of the process, in addition to the cans, to prevent cross contamination in adjacent stages of the rinser. Finally, the spray nozzles and air nozzles are impeded from reaching the insides of the cans by the mat on which the cans are carried. The mat also restricts drainage of the cleaning fluid from the cans.

GB 2041338A describes an apparatus for treating cans, which comprises a number of modules. Each module comprises a pair of drums, which rotate about vertical axes and are used to carry the cans through the various treatment stages. As the cans progress through the device, they are transferred from one drum to the next, thereby minimising cross contamination between stages. Whilst this device is more compact than the conventional rinsing devices described above, it still takes up a significant amount of floor space.

CH 459787 describes a bottle washing device, again comprising a plurality of rotating drums, which transport the bottles through the device. The drums are arranged to rotate about horizontal axes, which lie parallel to one another in the same horizontal plane. By mounting the drums vertically, the floor space occupied by this device

-3-

is much smaller than that occupied by the horizontally arranged drums described in GB 2041338A. However, a disadvantage of this arrangement is that the liquid used to wash and rinse the bottles remains inside the bottles until they pass through the part of the rotation cycle in which they are in an inverted position.

The aim of the present invention is to provide a modular rinsing device, having a smaller footprint (i.e. area of floor space occupied by the device) than the devices described in the prior art, whilst maintaining adequate drainage of the washing and rinsing fluids from the device. It will be appreciated that to obtain the most compact unit, the transport drums should be mounted vertically (rotating about horizontal axes), but this arrangement does not provide sufficient drainage of cleaning fluid from the containers. For maximum drainage of cleaning fluid, the drums should be mounted horizontally (rotating about vertical axes) with the open end of the containers pointing towards the floor and generally unobstructed. However, this arrangement takes up more floor space.

Accordingly, the present invention provides a rinse module for a rinsing device, comprising at least one circular turret rotatable about a substantially horizontal axis and adapted to transport containers through the rinse module, where they are rinsed with cleaning fluid, characterised in that the or each turret is adapted to support the containers around its periphery with their open ends pointing downwards at all times during the rotation cycle, and the axis of rotation of

-4-

the or each turret is arranged at an angle to the horizontal sufficient to ensure drainage of the cleaning fluid from the containers by gravity.

5 The turrets are arranged at a slight angle to the vertical (i.e. with their axis of rotation at an angle to the horizontal). This allows considerable space saving to be achieved, whilst the slight angle ensures adequate drainage of cleaning fluid from the container under the influence of gravity. The containers are mounted around
10 the periphery of the circular turrets, preferably with their longitudinal axes parallel to the axis of rotation of the turret. The containers are supported on the turrets, with as little obstruction of the open end of the container as possible. Mounting the containers in
15 this way, improves access for spray nozzles and air knives, used to wash and dry the containers respectively. The containers are orientated with their open ends pointing downwards to facilitate drainage of the cleaning fluid.

20 For a straight sided container such as a can, the inventors have determined that mounting the turrets at an angle of 15° to the vertical (with their axis of rotation at 15° to the horizontal), is sufficient to achieve adequate drainage of the cleaning fluid from the
25 container. Obviously containers having shaped sides or significantly reduced neck diameters may require the turrets to be mounted at a greater angle to the vertical, to ensure adequate drainage.

30 Preferably, each rinse module comprises a washing stage and a drying stage. The washing stage and drying

-5-

stage have independent circular turrets to transport the containers through the stage and means to transfer the containers from one turret to the next at the end of each stage. The drying stage minimises the amount of moisture
5 carried by the containers into the next rinse module and therefore reduces cross contamination as the containers pass from one rinse module to the next. Provision of separate circular turrets in the washing and drying stages has the advantage that the drying stage turret
10 remains substantially dry, as only the wet containers are transferred from the washing stage to the drying stage of the rinse module. The drying stage turret is not subjected to the spray of cleaning fluid. Thus, the turret does not have to be dried by the air knives and
15 the containers can be dried more quickly and effectively.

In a preferred embodiment of the invention, the turrets in the washing stage and drying stage are mounted about substantially horizontal axes which are arranged parallel to one another but offset vertically. Thus, the
20 turrets are staggered with respect to one another, with the drying stage turret mounted above the washing stage turret. This arrangement again reduces the footprint of the device and means that the two turrets can drain into the same collection tank.

25 The containers may be supported around the periphery of each turret between freely rotatable mandrels and a stationary guide rail suitably spaced from, but following the contour of the circumference of turret. In this arrangement, the turret is provided with a number of
30 pockets, defined by adjacent mandrels, with the

-6-

containers supported in the pockets. The turret is rotated so that the containers are carried past suitably arranged spray nozzles and air knives in the washing and drying stages respectively. Preferably, the guide rails
5 are arranged to apply a slight pressure between the containers and the inner mandrels, so that the containers rotate about their longitudinal axis as they move past the spray nozzles and air knives on the rotating turret. Alternatively, the rotation of the mandrels may be
10 driven, thereby driving rotation of the containers about their longitudinal axis.

Alternatively, the turret may take the form of a "star wheel" with a plurality of pockets located around the periphery of the turret. A stationary guide rail is
15 again used to support the containers, whilst the sides of the pockets drive the containers past the spray nozzles and air nozzles.

Preferably, the contact points on the mandrels, pockets and/or guide rails (where they touch the
20 containers) are made from a low absorbency, non-marking material, such as polyethylene. Contact between the container and the mandrels is minimised by providing rings of material around the circumference of the mandrels, in the form of O rings, for example.

25 Preferably, the material on the contact surface of the guide rails provides sufficient frictional contact with the containers that it "drives" rotation of containers about their longitudinal axis as they are carried along the guide rail by the rotating turrets.

-7-

At the transfer points from one turret to the next, the guide rails are arranged to ensure that the containers are transferred between turrets. As the risk of container jams is highest at these transfer points, the guide rails are preferably adapted to provide access to the turrets in this area, to allow removal of any jam. Access to the pockets at the transfer points may be provided, for example, by a spring loaded portion of the guide rail, which can be opened by an operator to reveal the pockets.

In the washing stages of the rinsing device, cleaning fluid (such as water, de-ionised water or detergents) is sprayed onto the passing containers by spray nozzles mounted along the path of the carrier. Preferably, de-ionised water is used as the cleaning fluid in the last rinse module to ensure that the containers are not smeared or streaky as they leave the rinser. In the preceding rinse modules, water may be used as the cleaning fluid. Preferably, the waste cleaning fluid from each rinse module is collected in an associated reservoir and is used to supply spray nozzles in the preceding rinse module. Thus, the containers are washed using progressively cleaner cleaning fluid as they move through the rinser. This arrangement reduces the water and or detergent consumption of the rinsing device.

The inventors have determined that the volume of cleaning fluid sprayed on to the cans is more important than the pressure at which the sprays operate. Therefore, the nozzles or spray bars in the washing stage of the rinse module are arranged to maximise the flow rate of

-8-

cleaning fluid passing over the containers. This may be achieved by providing more nozzles or by adapting the design of the nozzles so that they can supply a higher flow rate of cleaning fluid. This allows an effective
5 rinsing device to be provided without using the high pressure pumps, normally associated with conventional rinsing devices.

In a can making line, most of the contaminants on the cans are oil and grease. Where water is used as a
10 cleaning fluid, these contaminants will tend to collect on the surface of the waste water reservoirs and needs to be removed before the water is used in the spray bars of the preceding rinse modules. Floating contaminants may be removed, for example, using a simple weir arrangement.
15 Preferably, the reservoir tanks are of a suitable size to ensure that the water in the reservoirs is held for a sufficient period of time to allow solids to settle onto the base of the tank, before the water is recycled. Larger reservoir tanks also dilute any contaminants
20 draining into the tanks from the rinse modules.

In the drying stages of the rinsing device, air nozzles or air knives are directed onto the passing containers to remove as much moisture as possible before they are transferred into the next rinse module.
25 Preferably, a negative pressure is created inside one or more of the rinse modules, to remove vapour from the containers and keep them as clean as possible. For example, fans may be provided in ducting from the rinse module to extract vapour from that module.

-9-

The rinse modules may be provided with the washing stage and drying stage pre-arranged within the module. For example, where the washing and drying stage have separate circular turrets arranged in a staggered
5 formation, the turrets and guide rails may be aligned within the rinse module and fixed in this orientation to ensure smooth transfer of the containers between the turrets. This allows the rinsing device to be set up with any number of rinse modules connected together, using one
10 module as a datum against which the other modules can be aligned. This arrangement also allows simple replacement of a rinse module where necessary.

Preferred embodiments of the invention will now be described, by way of example only, with reference to the
15 drawings, in which:

Figure 1 shows a block diagram of one embodiment of the rinsing device according to the invention, showing the flow path of the water, air and cans through the rinser. Figure 2 shows a plan view of the circular turrets in a
20 rinse module according to one embodiment of the invention.

Figure 3 shows a side view of the turrets shown in Figure 2, mounted in a substantially vertical configuration within a rinse module.

25 Referring to figure 1, the rinsing device comprises three rinse modules 1, 2, and 3 and a pre-rinse module 4. Each of these modules comprises a washing stage 11, 21, 31, 41 and a drying stage 12, 22, 32, 42.

Each rinse module 1, 2, 3 is provided with an
30 associated reservoir tank 13, 23, 33. Preferably the

-10-

reservoir tanks 13, 23, 33 have a large volume (about 2000 litres for example) to allow good flow balancing and to dilute contaminants and allow solid particles to settle onto the base of the tanks. The main contaminants from the washing of cans are oils and grease, which tend to float on the surface of tanks. Therefore, each tank 13, 23, 33 is provided with a weir 16, 26, 36 providing an overflow from the surface of the tank at a flow rate of about 1 litre per minute. The flow rate of the overflow may be controlled by manual inspection and a simple ball valve arrangement. Alternatively, the overflow flow rate may be controlled automatically via a penstock and flow measurement device. The overflow from tanks 13, 23, 33 drains into the common effluent drain within the factory.

Cans are delivered to the rinser at variable speeds between 220 and 405 cans per minute. The rinser speed is matched to the can bodymaker speed +/- modulation speed using sensor control on the infeed to the rinser.

The cans enter the pre-rinse module 41 and are transported through this module by a rotating circular turret. As the cans pass through the washing stage 41, wash medium (normally water) at low pressure (about 2-3 barG), is sprayed onto the surfaces of the cans at a flow rate of about 10-30 litres per minute, preferably about 25 litres per minute. The spray nozzles in washing stage 41 are supplied from the reservoir tank 13, via the low pressure pump 14.

The cans then pass into the drying stage 42 where air blowers are directed onto the cans to remove as much

-11-

moisture from them as possible. The waste wash medium is allowed to drain, by gravity, from the pre-rinse module 4 into a common effluent drain within the factory.

Next, the cans are transferred to another circular turret and are transported through rinse module 1. As the cans pass through the washing stage 11, wash medium at a higher pressure (about 14 barG) is sprayed on to the surfaces of the cans at a flow rate of about 100 - 130 litres per minute. The high pressure rinse spray nozzles in washing stage 11 are supplied from the reservoir tank 13, via the high pressure pump 15. The high pressure pump 15 has a constant output but the spray nozzles may be adjusted using a regulator, which allows some water to bypass back to the reservoir tank 13. Reducing the amount of water bypassed to the tank 13, increases the pressure of the spray nozzle pressure.

At the end of washing stage 11, the cans enter a low pressure part of the wash cycle, where they are sprayed with wash medium at low pressure (about 2-3 barG) and a flow rate of about 10-30 litres per minute, preferably about 25 litres per minute. The low pressure spray nozzles are supplied from reservoir tank 23, via the low pressure pump 24. This final, low pressure part of the washing cycle, is supplied with wash medium from reservoir tank 23, associated with rinse module 2, to ensure that any moisture remaining on the cans when they enter rinse module 2 is as clean as the wash medium used in that rinse module.

The cans then pass into the drying stage 12 where air blowers are directed onto the cans to dry as much

-12-

moisture from them as possible. The waste wash medium from rinse module 1 is allowed to drain, by gravity, into reservoir tank 13.

Next, the cans are transferred to another circular turret and are transported through rinse module 2. As the cans pass through the washing stage 21, wash medium at higher pressure (about 14 barG) is sprayed on to the surfaces of the cans at a flow rate of about 100 - 130 litres per minute. The high pressure rinse spray nozzles in washing stage 21 are supplied from the reservoir tank 23, via the high pressure pump 25.

At the end of the washing stage 21, the cans enter a low pressure part of the wash cycle, where they are sprayed with wash medium at low pressure and a flow rate of about 10-30 litres per minute, preferably about 25 litres per minute. The low pressure spray nozzles are supplied directly from the factory supply. This low pressure part of the washing cycle uses water from the factory supply to minimise the contaminants in the moisture remaining on the cans when they enter rinse module 3. The factory supply is also used for fluid make up within the reservoir tanks 13, 23.

The cans then pass into the drying stage 22 where air blowers are directed onto the cans to remove as much moisture from them as possible. The waste wash medium from rinse module 2 is allowed to drain, by gravity, into reservoir tank 23.

Finally, the cans are transferred to another circular turret and are transported through rinse module 3. As the cans pass through the washing stage 31, de-

-13-

ionised water at low pressure (about 4 barG) is sprayed on to the surfaces of the cans at a maximum flow rate of about 65 litres per minute.

The cans then pass into the drying stage 32 where
5 air blowers are directed onto the cans to remove as much moisture from them as possible. The waste water from rinse module 3 is allowed to drain, by gravity, into reservoir tank 33. The water from reservoir tank 33 is
10 recycled to the factory supply via pump 34, at a flow rate below that of the de-ionised water supplied to the spray nozzles in washing stage 31 (at about 60 litres per minute, for example).

Rinse modules 1, 2 and 3 are preferably identical and adaptable, to allow interchangeability with other
15 modules. The modules are arranged to allow a fluid sealed connection of additional rinse modules at the infeed or discharge end of the modules. This arrangement provides a flexible system which can easily be expanded to provide additional washing stages where required. Furthermore,
20 rinse modules can easily be removed and replaced where necessary, for example for repairs or maintenance.

Referring to figures 2 and 3, a rinse module according to a preferred embodiment of the invention comprises two circular turrets 80, 90, which transport
25 the cans through the washing stage and drying stage respectively. Cans are directed onto the infeed of the washing turret 80 by means of guide rails 60 on the infeed of turret 80. A plurality of freely rotatable mandrels 50 are arranged around the perimeter of turrets
30 80 and 90 and the cans 70 are held in pockets defined

-14-

between adjacent mandrels 50. As shown in figure 3, the cans 70 are supported in the pockets with their longitudinal axes parallel to the axis of rotation of the turret 80, 90. A stationary guide rail 60 is arranged spaced from, but following the contour of the circumference of each turret 80, 90. The spacing between the guide rail 60 and the turret 80, 90 is sufficient to support the can 70 within the pockets defined by adjacent mandrels 50 whilst providing sufficient frictional contact that the cans 70 are rotated about their longitudinal axis as they move past the stationary guide rail 60. The rotation of the cans 70 is accommodated by rotation of the mandrels 50 about their longitudinal axis.

As the cans 70 move around the periphery of the turret 80, they are sprayed by a series of spray nozzles (not shown) which are arranged to spray wash medium over the internal and external surfaces of the cans 70. The cans 70 are then transferred onto the drying turret 90 by means of the guide rails 60. As the transfer point is the area where most can jams are likely to occur, the guide rails 60 at this point are provided with a spring loaded, hinged portion 65 which may be opened by an operator to provide access to the turrets 80, 90 at the transfer point.

Once transferred to the drying turret 90, the cans are again supported within pockets defined between adjacent mandrels 50 and an outer guide rail 60 which follows the contour of the circumference of the turret 90. As the cans move around the periphery of the drying

-15-

turret 90, they are acted upon by a series of air blowers or air knives (not shown) which are arranged to remove as much moisture as possible from the cans 70.

As shown in figure 3, the circular turrets 80, 90
5 are preferably arranged at an angle of 15° to the vertical, with the open ends 71 of the cans 70 pointing towards the floor. This arrangement reduces the amount of floor space occupied by each rinse module whilst ensuring adequate drainage of cleaning fluid from the cans, under
10 the effect of gravity. The cans 70 are supported by the mandrels 50 and the guide rails 60 with as small contact surfaces as possible. In this arrangement, the open end 71 of the can is not restricted by the support structure of the turrets and guide rails.

As shown in figures 2 and 3, the washing turret 80
15 and drying turret 90 are arranged with their axes of rotation parallel but offset vertically, so that the drying turret 90 is mounted above the washing turret 80. This arrangement reduces the floor space occupied by the
20 rinse module and also allows both turrets 80, 90 to drain into the same reservoir tank.

The guides, spray bars and mandrels are preferably mounted using quick release mechanisms to ensure ease of maintenance. The drive system for the turrets may be
25 provided by a belt pulley system, servo's, chains, gears or other suitable alternative. Finally, to provide a compact unit, the rinse modules may be mounted on top of their respective reservoir tanks.

The control system used to detect the movement of
30 cans through the rinsing device is the same in each rinse

-16-

module. The control systems in all rinse modules are integrated to allow the movement of cans to be tracked as they pass through the various modules of the rinsing device.

CLAIMS

1. A rinse module comprising at least one circular turret rotatable about a substantially horizontal axis and adapted to transport containers through the rinse module, where they are rinsed with cleaning fluid,
characterised in that
the or each turret is adapted to support the containers around its periphery with their open ends pointing downwards at all times during the rotation cycle, and
the axis of rotation of the or each turret is arranged at an angle to the horizontal sufficient to ensure drainage of the cleaning fluid from the containers by gravity.
2. A rinse module according to claim 1, wherein the or each turret is adapted to support the containers their principle longitudinal axes parallel to the rotation axis of the turret.
3. A rinse module according to claim 1 or claim 2, further comprising guide means, arranged to transfer the containers from one turret to the next.
4. A rinse module according to any of the preceding claims, wherein the turret is a star wheel with a plurality of pockets defined around its periphery, the pockets adapted to receive the containers.

-18-

5. A rinse module according to any one of claims 1 to 3, wherein the turret further comprises a plurality of rotatable mandrels arranged around its, adjacent mandrels defining pockets adapted to receive the containers.
6. A rinse module according to claim 4 or claim 5, further comprising a stationary guide rail arranged around at least part of the periphery of the turret and adapted to support the containers within the pockets.
7. A rinse module according to claim 6, wherein the guide rail is arranged to provide sufficient contact between the guide rail, the containers and the pockets, to rotate the containers about their longitudinal axes as they are transported around the periphery of the turret.
8. A rinse module according to any one of the preceding claims, wherein the or each turret is arranged with its axis of rotation at an angle of about 15° to the horizontal.
9. A rinse module according to any one of the preceding claims, comprising a washing stage and a drying stage, each stage having an independent circular turret and means for transferring the containers from one turret to the next at the end of each stage.
10. A rinse module according to claim 8, wherein the axes of rotation of the washing stage and drying stage


-19-

turrets are parallel but offset vertically from one another and the drying stage turret is located above the washing stage turret.

11. A rinsing device comprising a plurality of rinse modules in accordance with any of the preceding claims.
12. A rinsing device according to claim 11 wherein the waste cleaning fluid from each rinse module is used to supply the previous rinse module.
13. A rinsing device according to claim 11 or claim 12, wherein de-ionised water is used as the cleaning fluid in the final rinse module.
14. A rinsing device according to any one of claims 11 to 13, wherein a negative pressure is created inside at least some of the rinse modules to improve drying of the containers.


THIS PAGE BLANK (USE

Fig.1.

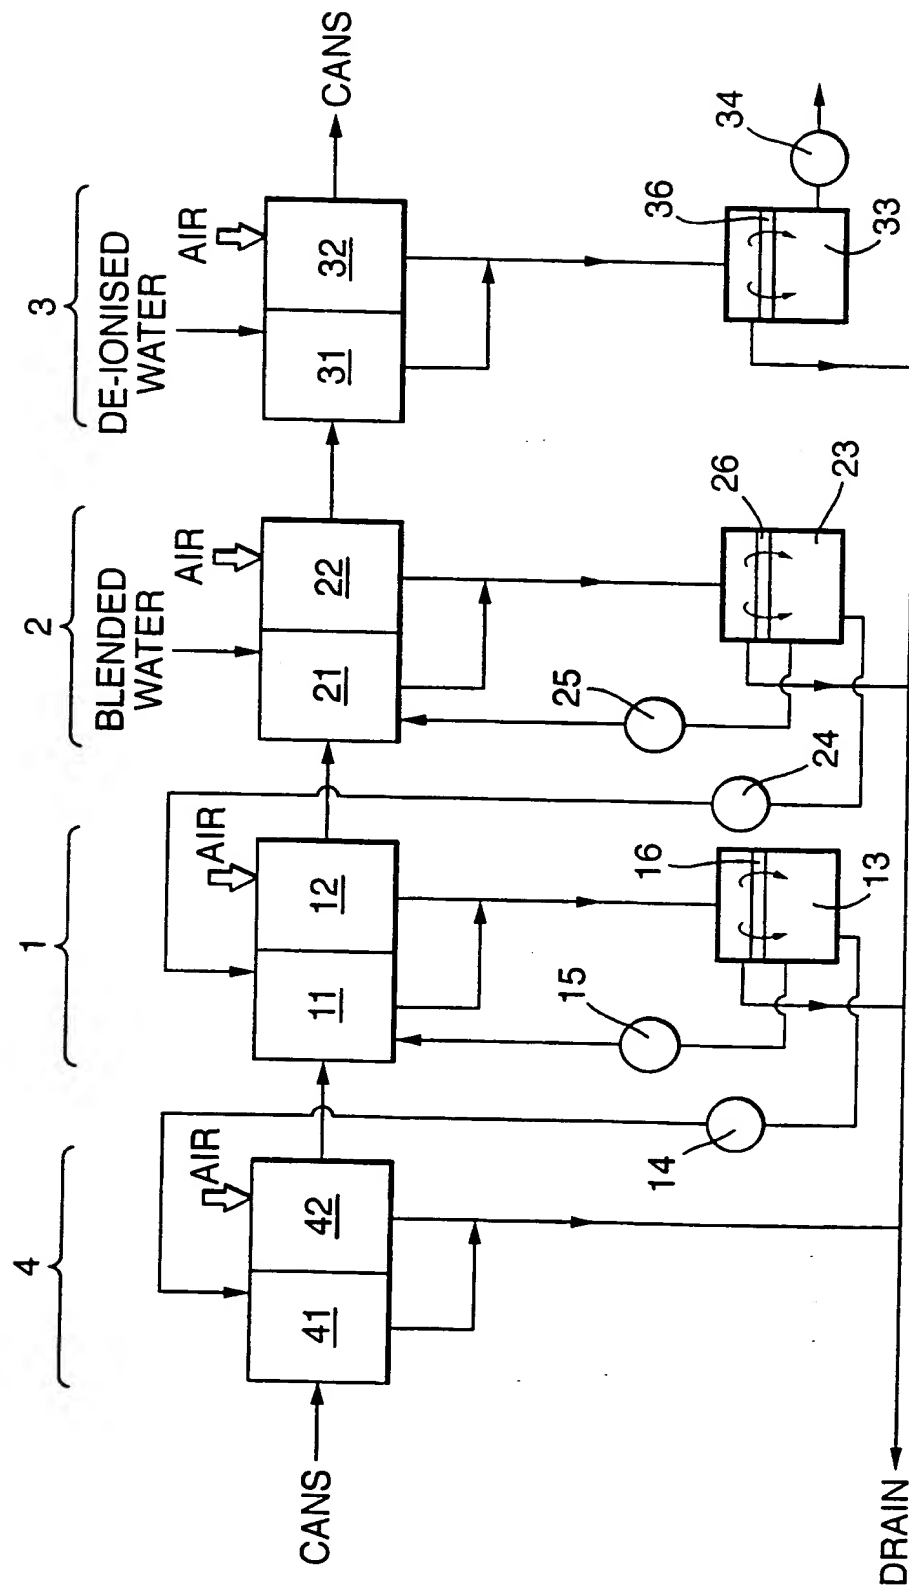


THIS PAGE BLANK (USE

2/3

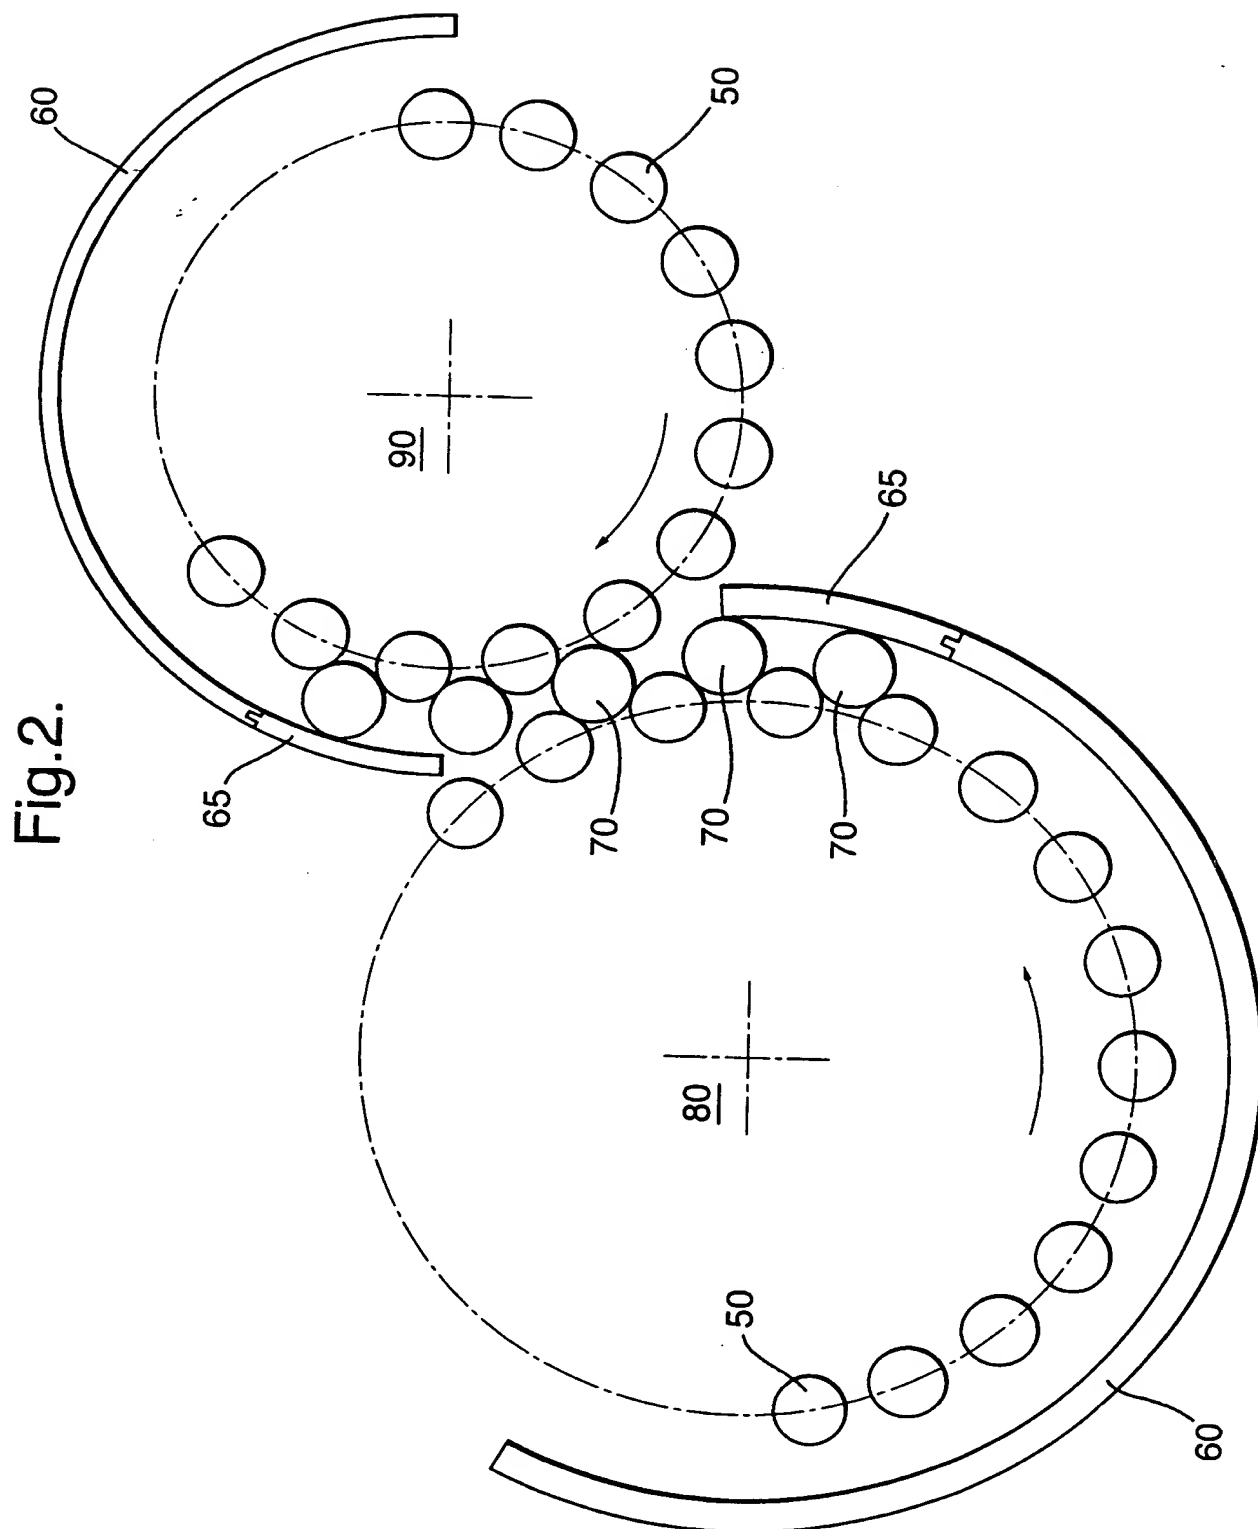

THIS PAGE BLANK (USPTO)

Fig.3.

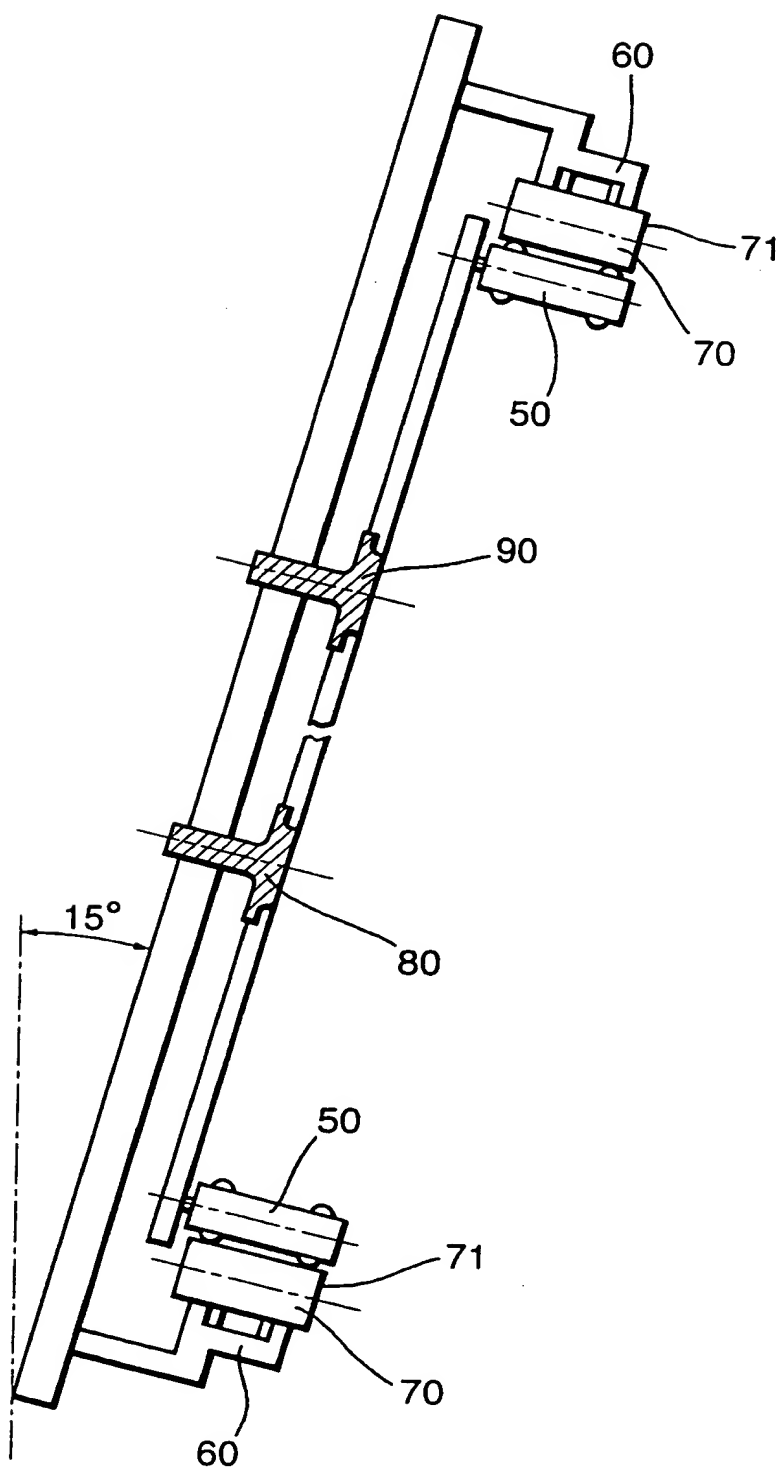

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/04315

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 374068	A	20-06-1990	FR 2640167 A	15-06-1990
CH 459787	A		NONE	
GB 2041338	A	10-09-1980	US 4346722 A	31-08-1982
			AR 224887 A	29-01-1982
			AU 535643 B	29-03-1984
			AU 5506980 A	21-08-1980
			BR 8000780 A	21-10-1980
			DE 3004832 A	14-08-1980
			FR 2448395 A	05-09-1980
			IT 1140547 B	01-10-1986
			JP 55126088 A	29-09-1980
			SE 439292 B	10-06-1985
			SE 8001050 A	13-08-1980
EP 636427	A	01-02-1995	US 5425385 A	20-06-1995
DE 4016950	A	28-11-1991	NONE	

THIS PAGE BLANK (USE),

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/GB 99/04315

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B08B9/32 B08B9/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B08B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 374 068 A (CLEMENS) 20 June 1990 (1990-06-20) abstract; figure 1	1
A	CH 459 787 A (KK NIHON SEIKOSHO) figure 1	1
A	GB 2 041 338 A (MIDLAND-ROSS) 10 September 1980 (1980-09-10) abstract; figures 1,7	1
A	EP 0 636 427 A (PEPSICO) 1 February 1995 (1995-02-01) column 3, line 35 -column 5, line 56 figures 1,2B	1
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "Z" document member of the same patent family

Date of the actual completion of the international search

20 March 2000

Date of mailing of the international search report

27/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Leitner, J

INTERNATIONAL SEARCH REPORT

ional Application No

PCT/GB 99/04315

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DE 40 16 950 A (SILBERZAHN) 28 November 1991 (1991-11-28) column 3, line 6 - line 48 figures 1,2</p>	1



PATENT COOPERATION TREATY

From the
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

Ismay
Any diary entry needed? *S.*
PCT *No marks*

To:

RATLIFF, Ismay Hilary
CARNAUDMETALBOX PLC
Downsview Road
Wantage
Oxfordshire OX12 9BP
GRANDE BRETAGNE

NOTIFICATION OF TRANSMITTAL OF THE INTERNATIONAL PRELIMINARY EXAMINATION REPORT (PCT Rule 71.1)

Date of mailing
(day/month/year)

18. 12. 00

Applicant's or agent's file reference
WO102WO

IMPORTANT NOTIFICATION

International application No.
PCT/GB99/04315

International filing date (day/month/year)
20/12/1999

Priority date (day/month/year)
23/12/1998

Applicant

CROWN CORK & SEAL TECHNOLOGIES CORPORATION et al.

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.


4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPEA/



European Patent Office
D-80298 Munich
Tel. +49 89 2399 - 0 Tx: 523656 epmu d
Fax: +49 89 2399 - 4465

Authorized officer

Luck, A

Tel. +49 89 2399-2665



THIS PAGE BLANK (USPTO)

PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT



(PCT Article 36 and Rule 70)

Applicant's or agent's file reference WO102WO	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/GB99/04315	International filing date (day/month/year) 20/12/1999	Priority date (day/month/year) 23/12/1998
International Patent Classification (IPC) or national classification and IPC B08B9/32		
Applicant CROWN CORK & SEAL TECHNOLOGIES CORPORATION et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2. This REPORT consists of a total of 4 sheets, including this cover sheet.
 - ☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 1 sheets.

3. This report contains indications relating to the following items:
 - I ☒ Basis of the report
 - II ☐ Priority
 - III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
 - IV ☐ Lack of unity of invention
 - V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
 - VI ☐ Certain documents cited
 - VII ☐ Certain defects in the international application
 - VIII ☐ Certain observations on the international application

Date of submission of the demand 17/06/2000	Date of completion of this report 18. 12. 00
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Benze, W Telephone No. +49 89 2399 2085 

IS PAGE BLANK (USPTO)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB99/04315

I. Basis of the report

1. This report has been drawn on the basis of *(substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments (Rules 70.16 and 70.17).):*

Description, pages:

1-16 as originally filed

Claims, No.:

5-14 as originally filed

1-4 as received on 04/11/2000 with letter of 02/11/2000

Drawings, sheets:

1/3-3/3 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

THIS PAGE BLANK (USPTO)

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB99/04315

- ☐ the description, pages:
☐ the claims, Nos.:
☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-4
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-14
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-14
	No:	Claims	

2. Citations and explanations
see separate sheet

THIS PAGE BLANK (USPTO)

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB99/04315

Re Point V.

The subject of claim 1 is novel against the state of the art (CH-A-459 787). The claim is correctly delimited against this state of the art.

The characterizing features are not obvious. The features of the independent claim specify a rinse module of compact construction and providing for immediate drainage of rinsing liquid from the containers.

Claim 1 meets the requirements of Article 33 of the PCT.

THIS PAGE BLANK (USPTO)

-17-

CLAIMS

1. A rinse module comprising at least one circular turret rotatable about an axis and adapted to transport containers through the rinse module, where they are rinsed with cleaning fluid, characterised in that the or each turret is adapted to support the containers around its periphery with their open ends pointing downwards at all times during the rotation cycle, and the axis of rotation of the or each turret is arranged at an angle to the horizontal sufficient to ensure drainage of the cleaning fluid from the containers by gravity.
2. A rinse module according to claim 1, wherein the or each turret is adapted to support the containers their principle longitudinal axes parallel to the rotation axis of the turret.
3. A rinse module according to claim 1 or claim 2, further comprising guide means, arranged to transfer the containers from one turret to the next.
4. A rinse module according to any of the preceding claims, wherein the turret is a star wheel with a plurality of pockets defined around its periphery, the pockets adapted to receive the containers.

AMENDED SHEET

THIS PAGE BLANK (USPTO)

PATENT COOPERATION TREATY

PCT


REC'D 20 DEC 2000

WIPO

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference WO102WO		FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/GB99/04315	International filing date (day/month/year) 20/12/1999	Priority date (day/month/year) 23/12/1998	
International Patent Classification (IPC) or national classification and IPC B08B9/32			
Applicant CROWN CORK & SEAL TECHNOLOGIES CORPORATION et al.			
<p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of 4 sheets, including this cover sheet.</p> <p><input checked="" type="checkbox"/> This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of 1 sheets.</p>			
<p>3. This report contains indications relating to the following items:</p> <ul style="list-style-type: none"> I <input checked="" type="checkbox"/> Basis of the report II <input type="checkbox"/> Priority III <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability IV <input type="checkbox"/> Lack of unity of invention V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement VI <input type="checkbox"/> Certain documents cited VII <input type="checkbox"/> Certain defects in the international application VIII <input type="checkbox"/> Certain observations on the international application 			
Date of submission of the demand 17/06/2000		Date of completion of this report 18.12.00	
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465		Authorized officer Benze, W Telephone No. +49 89 2399 2085	



THIS PAGE BLANK (USPTO)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB99/04315

I. Basis of this report

1. This report has been drawn on the basis of *(substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments (Rules 70.16 and 70.17).):*

Description, pages:

1-16 as originally filed

Claims, No.:

5-14 as originally filed

1-4 as received on 04/11/2000 with letter of 02/11/2000

Drawings, sheets:

1/3-3/3 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

THIS PAGE BLANK (USPTO)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB99/04315

- ☐ the description, pages:
- ☐ the claims, Nos.:
- ☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-4
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-14
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-14
	No:	Claims	

2. Citations and explanations
see separate sheet

THIS PAGE BLANK (USPTO)

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB99/04315

Re Point V.

The subject of claim 1 is novel against the state of the art (CH-A-459 787). The claim is correctly delimited against this state of the art.

The characterizing features are not obvious. The features of the independent claim specify a rinse module of compact construction and providing for immediate drainage of rinsing liquid from the containers.

Claim 1 meets the requirements of Article 33 of the PCT.

THIS PAGE BLANK (USPTO)

-17-

CLAIMS

1. A rinse module comprising at least one circular turret rotatable about an axis and adapted to transport containers through the rinse module, where they are rinsed with cleaning fluid, characterised in that the or each turret is adapted to support the containers around its periphery with their open ends pointing downwards at all times during the rotation cycle, and the axis of rotation of the or each turret is arranged at an angle to the horizontal sufficient to ensure drainage of the cleaning fluid from the containers by gravity.
2. A rinse module according to claim 1, wherein the or each turret is adapted to support the containers their principle longitudinal axes parallel to the rotation axis of the turret.
3. A rinse module according to claim 1 or claim 2, further comprising guide means, arranged to transfer the containers from one turret to the next.
4. A rinse module according to any of the preceding claims, wherein the turret is a star wheel with a plurality of pockets defined around its periphery, the pockets adapted to receive the containers.

AMENDED SHEET

THIS PAGE BLANK (USPT)

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference W0102W0	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 99/ 04315	International filing date (day/month/year) 20/12/1999	(Earliest) Priority Date (day/month/year) 23/12/1998
Applicant CROWN CORK & SEAL TECHNOLOGIES CORPORATION et al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the language, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international search was carried out on the basis of the sequence listing:

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ Certain claims were found unsearchable (See Box I).

3. ☐ Unity of invention is lacking (see Box II).

4. With regard to the title,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the drawings to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

2
☐ None of the figures.

THIS PAGE BLANK (USPTO)